


# Plastifloor® 510 Terrazzo, quick curing alternative for EP Terazzo

Quick installation, jointless execution of wall incl. Base, color separations possible, fully loadable already 2 hours after installation

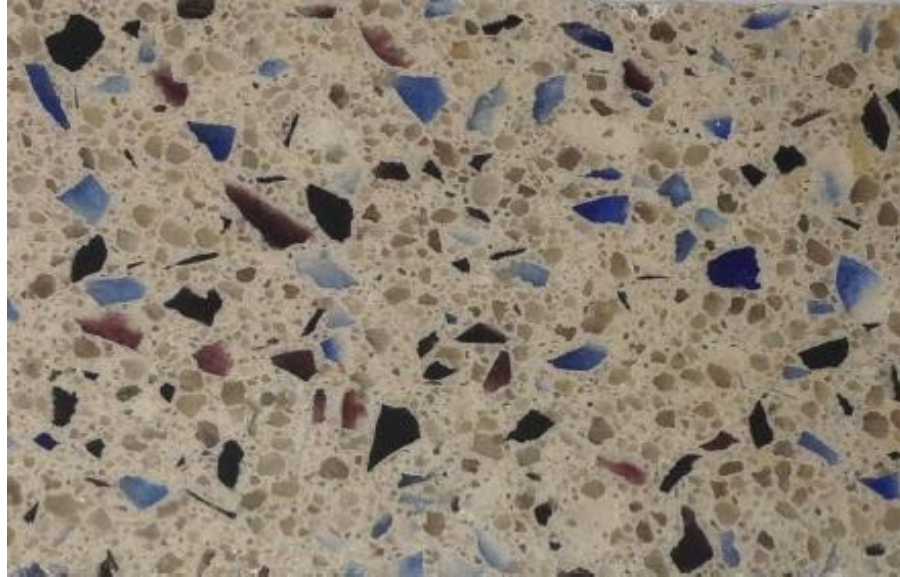

## 2. Sealer

Plastifloor® 522

200 ft<sup>2</sup>/gal

clear

Polishing

## Sealer

Plastifloor® 510

100 ft<sup>2</sup>/gal

10 % Pigmentpaste

Grinding

## Coating

Plastifloor® 510

30 ft<sup>2</sup>/gal

1:4 with Filler C2

5 % Pigmentpaste

Up to 30 % Gritt

Coarse sanding

## Membrane

Plastifloor® 332

30 ft<sup>2</sup>/gal

1:1 with Filler

lightly broadcasted

witht Sand 16-30mesh

## Primer

Plastifloor® 112/113

75 – 100 ft<sup>2</sup>/gal

lightly broadcasted

with Sand 16-30mesh