


Plastifloor® 418 trowel on coating with Membrane (R 10), dry areas

Fast and seamless installation from wall to wall including coves, many different colors or lining available, 2 h after installation fully loadable.

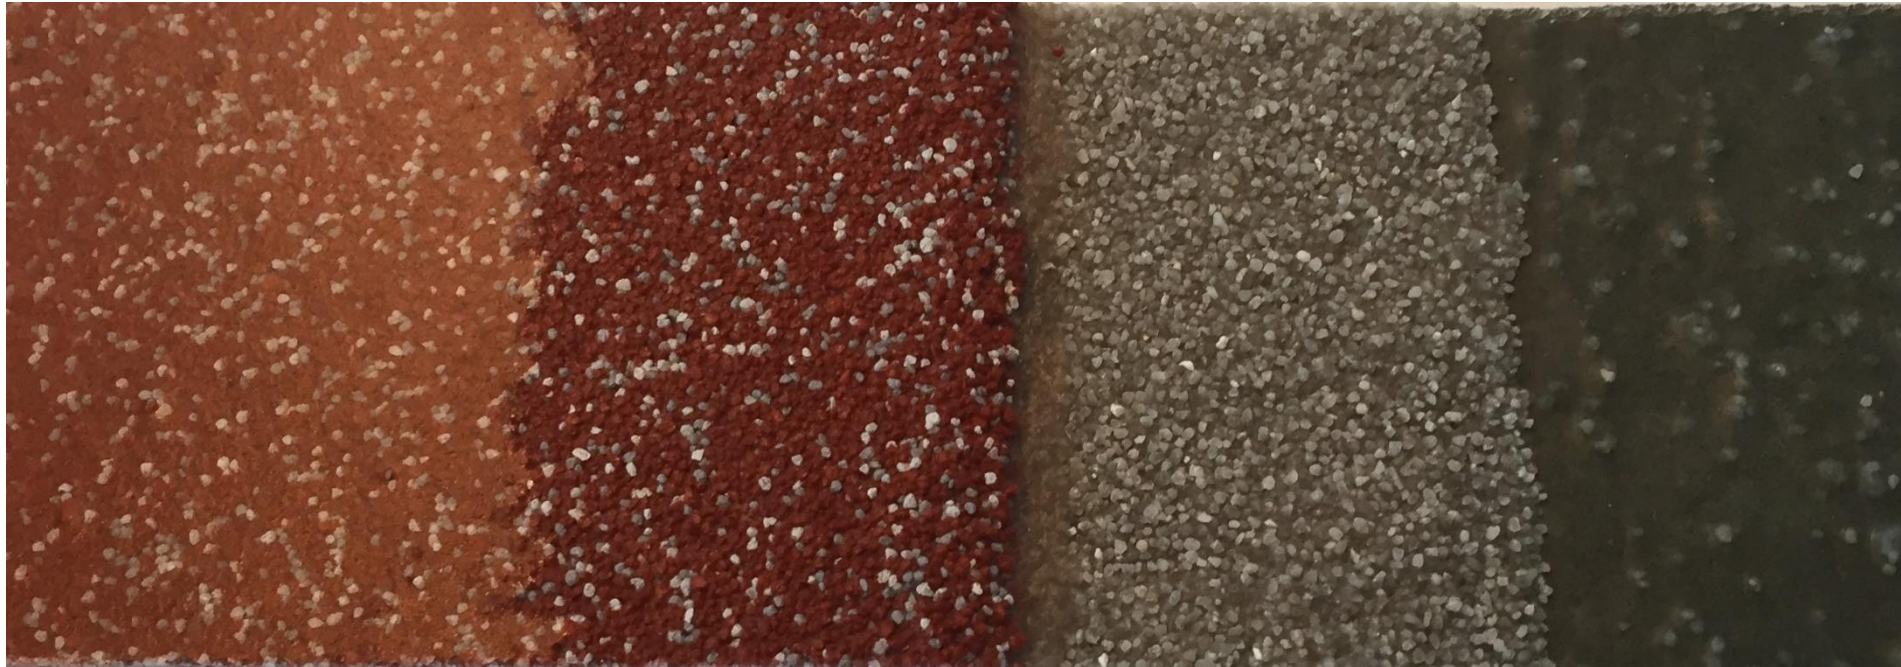

Sealer

Plastifloor® 522
100 ft²/gal
clear

Coating

Plastifloor® 418
15 ft²/gal
1:4 mix with color quartz
7,5 kg/m²

Membrane

Plastifloor® 332
30 ft²/gal
1:1 with s/l filler
broadcast with
Quartz mesh 16-30

Primer

Plastifloor® 112/113
75 – 100 ft²/gal
slightly broadcast
Quartz mesh 16-30